SPECIFICATION FOR APPROVAL

承认书

CUSTOMER	NUMBER		
客户名称:	编 号: Y-18042603		
DESCRIPTION	QUANTITY		
品 名: 贴片共模电感	数 量: 10pcs		
PART NO.	DATE		
型 号: BCDM2311-2-152T	日 期: 2018/6/21		
CUSTOMER PART NO.	NOTE		
客户料号:	注 解:		

APPROVAL SIGNATURE 客户承认签章

APPROVED BY 核 准	Q. C. DEPT. 品 管	CHECKED BY 核 查	DRAWN BY 制 作

深圳市宝创达电子有限公司

SHENZHEN BAOCHUANGDA ELECTRONICS CO., LTD.

地址:深圳市龙华区观澜街道横坑河西村77号A栋2楼 Add: 2nd floor building A no.77 hexi village guanlan Street longhua district shenzhen

Tel: 0755-29736760 Fax: 0755-28056434


客户	
CUSTOMER	


规格型号 PART NO


BCDM2311-2-152T

1: 外形尺寸: (单位: mm)

OVERALLDIMESSON (UNIT:mm)








尺寸	A	В	С	D	Е	F
单位mm	20.0±0.5	23.0±0.5	11.5 MAX	8.4Ref	3.0Ref	2.4Ref


2:接线图: 两组线分绕

WIRING DIAGRAM: SEPARATE WINDING

3: 焊接尺寸: mm WELDING DIMENSION: mm



No polarity



4:电气性能参数(ELECTRICAL PARAMETERS)

电 感 量 及 允 许偏差 (1KHz/ 0.25V)	L12=L34: 1.5mH(MIN)
直流电阻 DC RESISTANCE	26m Ω (MAX)
额 定 电 流 RATED CURRENT	4.5A MAX
阻 抗(3MHz) IMPEDANCE	3300Ω MIN

测试仪表(MEASUREMENT INSTRUMENT):

HM2791 HM2801 HP4285 CH19073

在最坏情况下建议零件的温度不超过+125°C。(It is recommended that the temperature of the part does not exceed +125°C under worst case conditions.)

贮存环境(Storage conditions):存放环境温度-20°C至60°C,相对湿度不高于70%,并存放在不含硫和氯的空气气氛中(请不要直接暴露在阳光下) Storage ambient temperature-20°C to 60°C,70%RH or less, and isolate the parts from sulphic and chloric atm osphere. (Please don't expose to the sun directly)

	SPEC. NO.:
Note:	Y-18042603
	1/2


零件工作温度(Operating temperature of parts): -40° C - 125° C

温升 (Temperature Rise): < 55K


电性能试验条件 (Est conditions of Electrical Properties): 20°C、 相对湿度33% (20°C, 33% RH)

没有特殊规定下(If not specified differently)

5: 阻抗曲线图(IMPEDANCE CURVE)

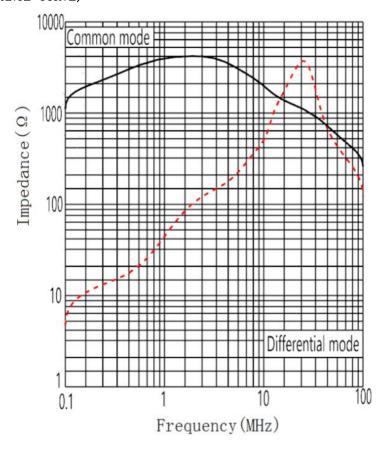

6:包装(PACKING)

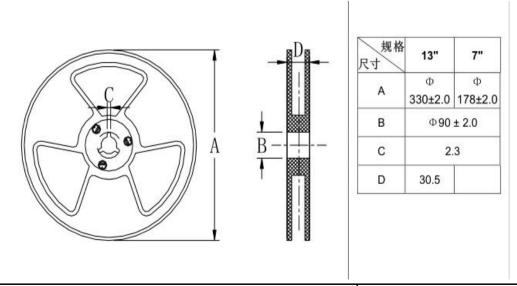

SPEC. NO.: Y-18042603 2/2