

SPECIFICATION FOR APPROVAL

承 认 书

CUSTOMER	NUMBER
客户名称:	编 号:
DESCRIPTION	QUANTITY
品 名: 贴片共模滤波器	数 量:
PART NO.	DATE
型 号: BCDCM4520-2-231T	日 期:
CUSTOMER PART NO.	NOTE
客户料号:	注 解:

APPROVAL SIGNATURE 客户承认签章

APPROVED BY 核 准	Q. C. DEPT. 品 管	CHECKED BY 核 查	DRAWN BY 制 作

深圳市宝创达电子有限公司
SHENZHEN BAOCHUANGDA ELECTRONICS CO., LTD.
地址: 深圳市龙华区观澜街道横坑河西村77号A栋2楼
Add: 2nd floor building A no.77 hexi village guanlan
Street longhua district shenzhen
Tel: 0755-29736760 Fax: 0755-28056434
Http:// www.bcdcn.com

BCDCM4520-2-231T

DC COMMON MODE FILTER

FEATURES

- A chip-type common mode filter for large current applications. Common mode impedance surpasses 180 Ω at 100MHz. Noise is greatly suppressed.
- Capable of handling the highest current(up to 3A) of any chip-type common mode filter.
- Height and size have been considered ,resulting in a compact and light-weight choke coil.Applicable for the miniaturization required to reduce the size and weight of portable equipment.
- The products contain no lead and also support lead-free soldering.
- The product does not contain regulatde substances that are slated to be included in ROHS.



APPLICATIONS

Used for power line noise suppression for any electronic-devices
Used to counter adapter/battery line noise for relatively large electronic devices such as notebook PCs,stand-alone word processors, etc

TEMPERATURE RANGES

Operating	-40to+125℃
Storage(After mount)	-40to+125℃

Part Number System

BCDCM 4520 -2 -231 T
① ② ③ ④ ⑤

- ① Type:BCDCM
- ② External Dimensions(W×A) (mm):4.5*2.0
- ③ Number of Lines: 2
- ④ Impedance:231=230 Ω
- ⑤ Packing:Tape & Reel

ELECTRICAL CHARACTERISTICS

Part No.	Impedance[at 100MHz]		DC resistance	Rated current	Insulation resistance
	(Ω)min	(Ω)typ	(m Ω)max[1 line]	ldc(A)max	(M Ω)min
BCDCM4520-2-231T	180	230	45	3.0	10


BCDCM4520-2-231T

DC COMMON MODE FILTER

TYPICAL ELECTRICAL CHARACTERISTICS

IMPEDANCE vs. FREQUENCY CHARACTERISTICS

BCDCM4520-2-231T



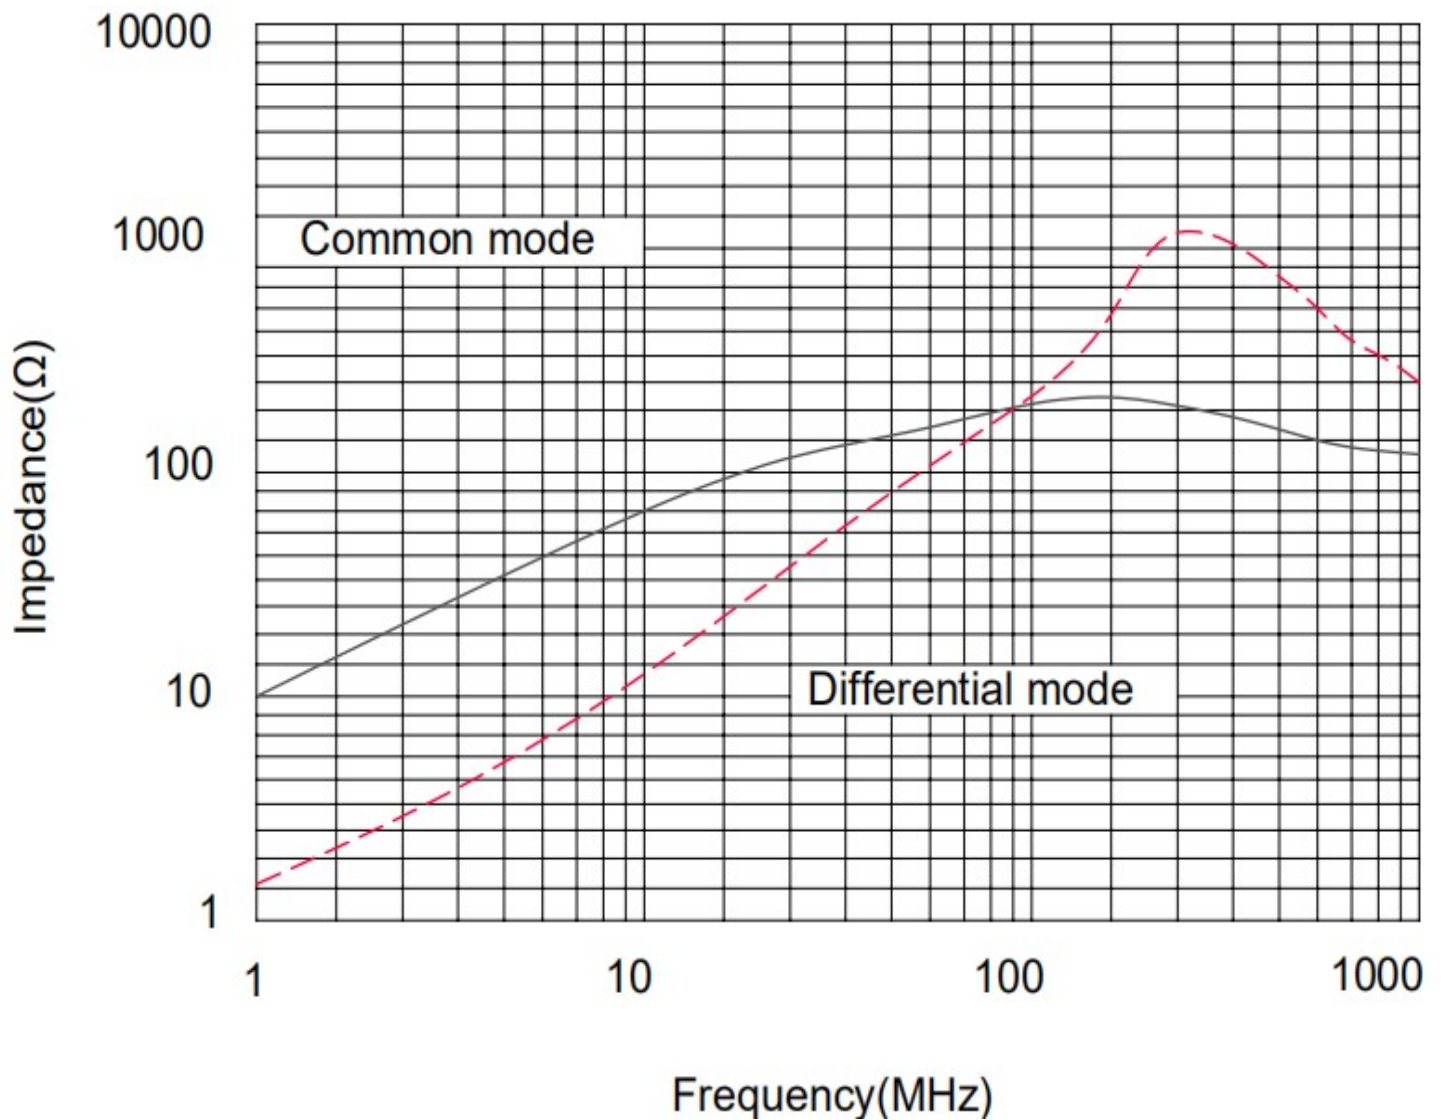


BCDCM4520-2-231T

DC COMMON MODE FILTER

SHAPES AND DIMENSIONS/CIRCUIT DIAGRAM/RECOMMENDED
PC BOARD PATTERN(REFLOW SOLDERING)

◆ Dimensions (mm)



UNIT: mm

A: 4.7 ± 0.5


B: 4.5 ± 0.5

C: 2.4 (MAX)


D: 2.7 E: 1.0

F: 1.15 G: 0.85

◆ Land Pattern (mm)

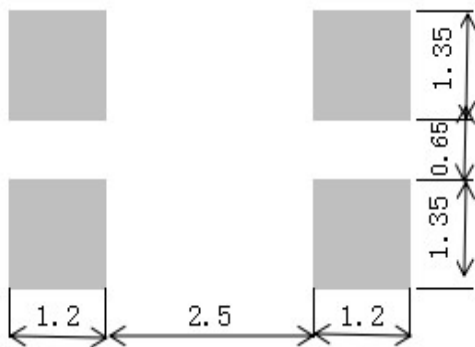

◆ Schematics (Bottom)

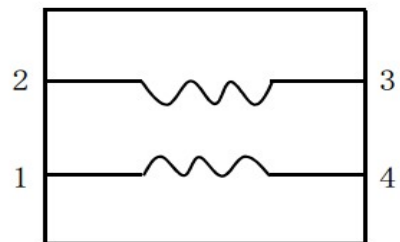


No polarity

BCDCM4520-2-231T


DC COMMON MODE FILTER

Recommended Reflow Temperature Curve

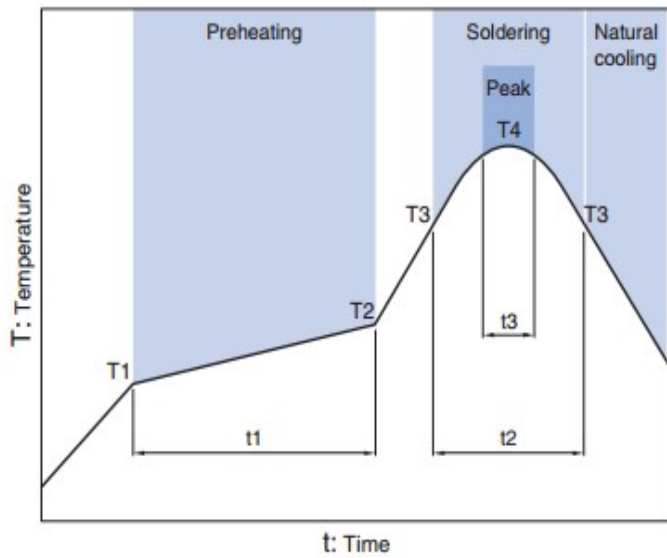

Preheating			Soldering		Peak	
Temp.		Time	Temp.	Time	Temp.	Time
T1	T2	t1	T3	t2	T4	t3
150°C	180°C	60 to 120s	230°C	10 to 30s	245°C	5s

Package
size (mm)

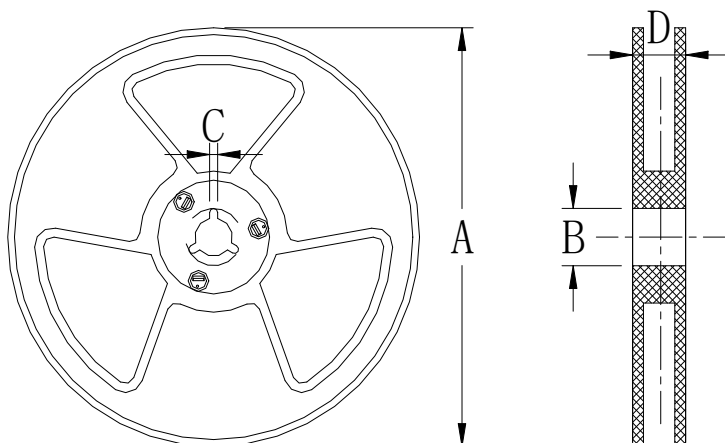

size	Specs	7"
A		$\Phi 178 \pm 2.0$
B		$\Phi 58$
C		4.8
D		14.5