

SPECIFICATION FOR APPROVAL

承 认 书

CUSTOMER	NUMBER
客户名称:	编 号:
DESCRIPTION	QUANTITY
品 名: 贴片共模滤波器	数 量:
PART NO.	DATE
型 号: BCDCM7060-2-701TB	日 期:
CUSTOMER PART NO.	NOTE
客户料号:	注 解:

APPROVAL SIGNATURE 客户承认签章

APPROVED BY 核 准	Q. C. DEPT. 品 管	CHECKED BY 核 查	DRAWN BY 制 作

深圳市宝创达电子有限公司
SHENZHEN BAOCHUANGDA ELECTRONICS CO., LTD.
地址: 深圳市龙华区观澜街道横坑河西村77号A栋2楼
Add: 2nd floor building A no.77 hexi village guanlan
Street longhua district shenzhen
Tel: 0755-29736760 Fax: 0755-28056434
Http:// www.bcdcn.com

BCDCM7060-2-701TB

DC COMMON MODE FILTER

FEATURES

- A chip-type common mode filter for large current applications.
Common mode impedance surpasses 500Ω at 100MHz.
Noise is greatly suppressed.
- Capable of handling the highest current(up to 2.8A) of any chip-type common mode filter.
- Height and size have been considered ,resulting in a compact and light-weight choke coil.Applicable for the miniaturization required to reduce the size and weight of portable equipment.
- The products contain no lead and also support lead-free soldering.
- The product does not contain regulatde substances that are slated to be included in ROHS.



APPLICATIONS

Used for power line noise suppression for any electronic-devices
Used to counter adapter/battery line noise for relatively large electronic devices such as notebook PCs, stand-alone word processors, etc

TEMPERATURE RANGES

Operating	—40to+125℃
Storage(After mount)	—40to+125℃

Part Number System

BCDCM 7060 -2 -701 T B
① ② ③ ④ ⑤ ⑥

- ① Type:BCDCM
- ② External Dimensions(L×W) (mm) :7.0*6.0
- ③ Number of Lines: 2
- ④ Impedance:701=700 Ω
- ⑤ Packing:Tape & Reel
- ⑥ Management Symbol:B

ELECTRICAL CHARACTERISTICS

Part No.	Impedance (Ω) [at 100MHz]		DC resistance	Rated current	Insulation resistance
	min	typ	(mΩ) max[1 line]	ldc (A) max	(MΩ) min
BCDCM7060-2-701TB	500	700	27	2.8	10


BCDCM7060-2-701TB

DC COMMON MODE FILTER

TYPICAL ELECTRICAL CHARACTERISTICS

IMPEDANCE vs. FREQUENCY CHARACTERISTICS

BCDCM7060-2-701TB

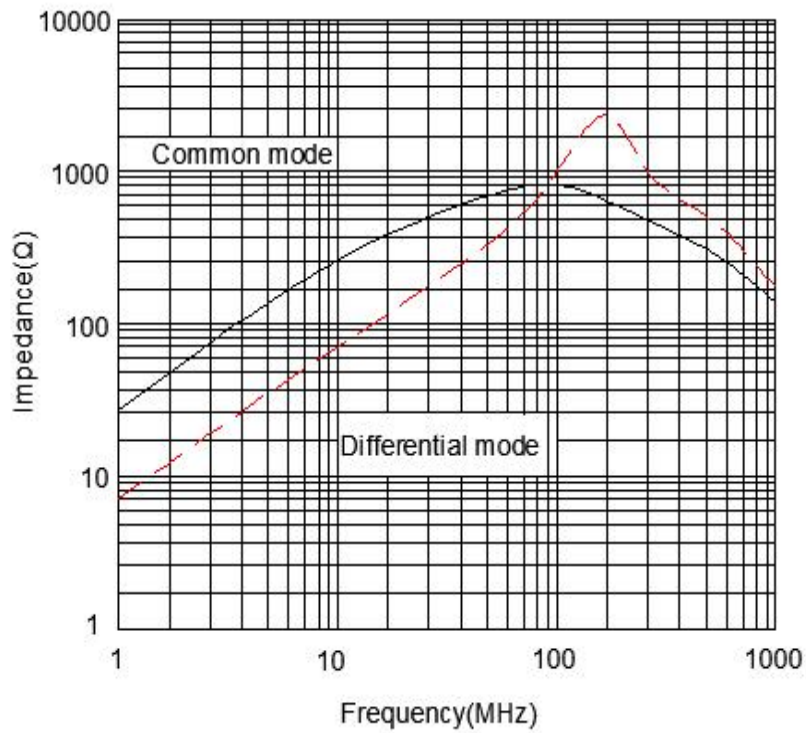


BCDCM7060-2-701TB

DC COMMON MODE FILTER

SHAPES AND DIMENSIONS/CIRCUIT DIAGRAM/RECOMMENDED
PC BOARD PATTERN(REFLOW SOLDERING)

◆ Dimensions (mm)

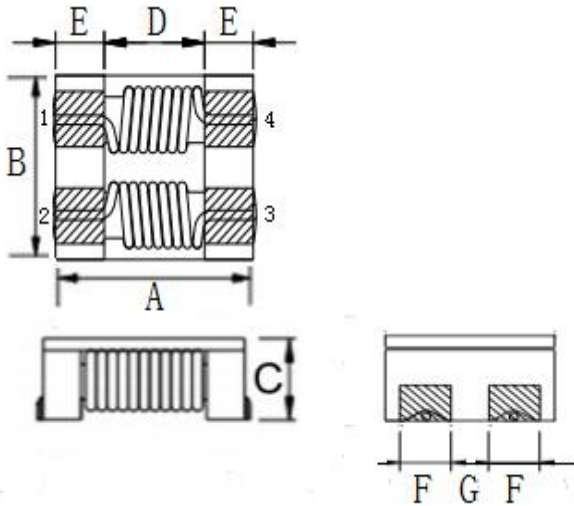

UNIT: mm

A: 7.0 ± 0.3


B: 6.0 ± 0.3

C: 2.8 (MAX)


D: 3.5 E: 1.7

F: 1.5 G: 1.5

◆ Land Pattern (mm)

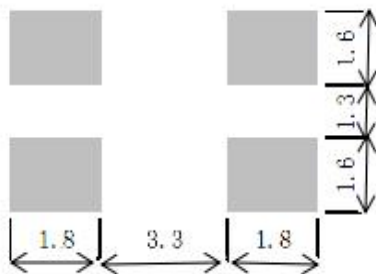

◆ Schematics (Bottom)




No polarity

BCDCM7060-2-701TB


DC COMMON MODE FILTER

Recommended Reflow Temperature Curve

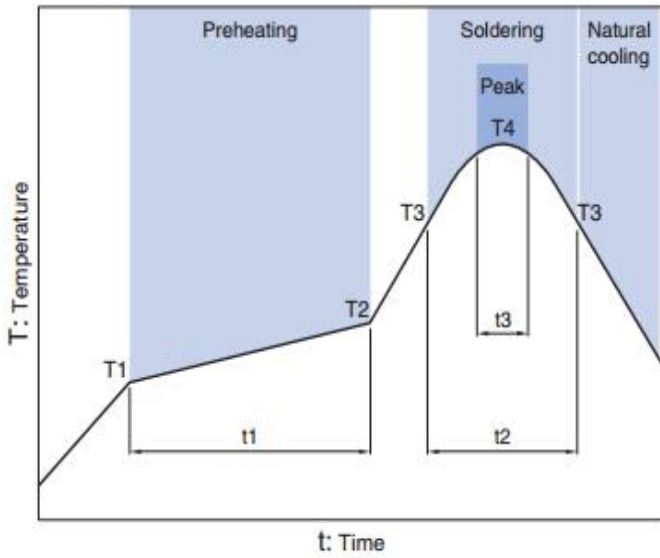

Preheating			Soldering		Peak	
Temp.	Time		Temp.	Time	Temp.	Time
T1	T2	t1	T3	t2	T4	t3
150°C	180°C	60 to 120s	230°C	10 to 30s	245°C	5s

Package
size (mm)

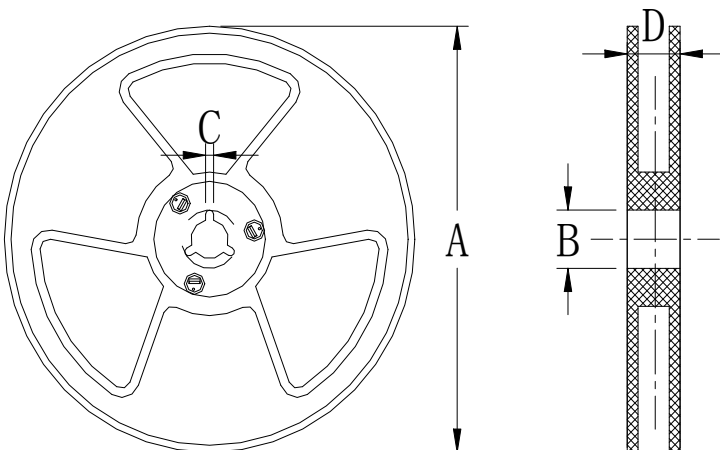

size \ Specs	13"	7"
A	$\Phi 330 \pm 2.0$	$\Phi 178 \pm 2.0$
B	$\Phi 90 \pm 2.0$	
C	2.3	
D	21.5	